


# BookTEK<sup>®</sup> 5

A2+ Book Scanner

The production scanner for  
challenging digitization projects

V2 Archive

**Next Generation!**

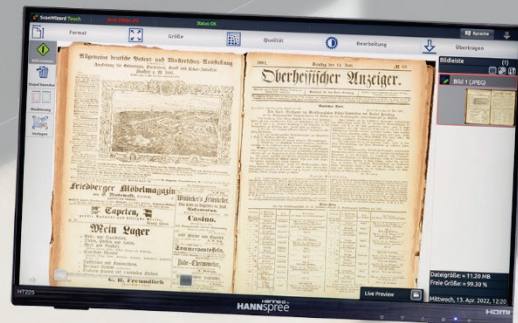

**Most versatile 600 dpi archive scanner.  
Self-adjusting book cradle with  
V-shaped or optional flat glass plate.**

Image  
Access

© 06\_2025 / EN



- OVERHEAD BOOK SCANNER  
DIN/ISO A2+14%
- FADGI, METAMORFOZE,  
ISO 19264 COMPLIANT
- 600 x 600 DPI SCANNER  
RESOLUTION
- 0.9 SEC FOR A2+ SCAN  
@150 DPI
- SELF-ADJUSTING BOOK  
CRADLE WITH LIFT 10 CM
- SCANNING IN  
V-MODE (120°)  
AND FLAT MODE (180°)
- V-SHAPED GLASS PLATE  
AND OPTIONAL FLAT  
GLASS PLATE FOR  
PERFECT SCANS
- LASER ASSISTED BOOK  
FOLD CORRECTION
- SCAN CLIENT INTERFACE
- DIGITAL COLOR BALANCE
- INTEGRATED ICC PROFILE
- INTEGRATED 64BIT LINUX,  
INTEL CORE I3 GEN.8 240GB  
SSD, 8GB RAM
- 2,5 GIGABIT TCP/IP  
NETWORK INTERFACE
- SUPPORTS SRGB, ADOBE  
RGB, NATIVE COLOR  
SPACES
- VIRUS RESISTANT LINUX  
OPERATING SYSTEM
- EXCELLENT ENERGY  
EFFICIENCY, CEC LEVEL VI
- 2 x USB 3.0 PORTS  
ACCESSIBLE ON FRONT  
PANEL
- EASY INSTALLATION VIA  
SCAN2NET® TECHNOLOGY



*Simple operation, highest productivity.*

*The BookTEK® 5 V2 Archive book scanner qualifies as a production system for all challenging digitization projects. Self-adjusting book cradle with V-shaped as well as an optional flat glass plate.*

*Using the latest camera technology from Image Access, this scanner meets FADGI and ISO 19264 specifications.*

**PRODUCTIVITY MEETS QUALITY IN DIGITIZATION!**

## The production system for digitization projects

### Highlights: Self-adjusting book cradle with V-shaped glass plate and optional flat glass plate

BookTEK® 5 V2 Archive is suitable for digitization projects that require high quality and maximum productivity even in 24/7 operation. Originals up to A2+ in size such as books, magazines, posters, folders, or bound documents of all types, can be digitized at high speed and a resolution up to 600 dpi using the BookTEK® 5 V2 Archive.

The unique self-adjusting book cradle solution allows scanning either at a 120-degree angle or in horizontal mode and lying flat with a height compensation of 10 cm.

### Glass plate solutions

The book cradle enables perfect scans while protecting the book binding. The V-shaped glass plate can be removed in a few simple steps. Depending on requirements, the BookTEK® 5 V2 Archive can now be used with an optional flat glass plate or without a glass plate at all.



*Scanning newspapers up to A2 with flat glass plate.*

### Highlights that make the BookTEK® 5 V2 Archive the right choice for every application

- Large 21" full HD color multitouch screen for simplified operation, 2<sup>nd</sup> preview screen optional
- Live Preview
- Self-adjusting book cradle 120 - 180 degrees can lift 10 cm
- V-shaped glass plate for perfect scans, optional flat glass plate is available
- Output formats: PDF, PDF/A, JPEG, TIFF, PNM, multipage PDF and TIFF, DICOM and many more
- OS independent, runs with Windows, Linux, Mac
- Digital color balance, wide color gamut, supports sRGB, Adobe RGB, native RGB
- FADGI, Metamorfoze, ISO 19264 compliant.
- ScanWizard runs through any browser via network
- Remote maintenance, troubleshooting and firmware updates
- Full Coverage Warranty – Up to 5 years, free spare parts & consumables



*Scanning highly glossy originals with V-shaped glass plate.*

### BookTEK® 5 Archive Markets

- Libraries, Archives
- Service Providers
- Government and private commercial organizations
- Universities
- Information Facilities
- Research Facilities

### BookTEK® 5 Archive Applications

- Digitizing books and bound documents
- Digitizing files from file folders
- Digitizing stapled documents like contracts, account ledgers and documentation
- Preserving books and sensitive historical documents
- Scan fragile material, such as damaged, brittle, wavy, or fragile books.

# What's in the Box?

- Base unit with book cradle and glass plate
- 21" full HD, 1920 × 1080p resolution touch screen
- Power supply for scanner and 21" screen including power cords
- Foot switch
- Test and calibration targets
- One year of Full Coverage Warranty
- Suitable for mobile applications
- Easy installation (ready to use in under 1 hour)

## Options

- **BE5-V2-GLAS-FLAT** Flat Glass Plate
- **BSW-6-BE5-A2** Batch Scan Wizard 6 License
- **SCAN2OCR** Background OCR on scanner
- **BE5-V2-P-SP12M** Full Coverage Warranty, up to 5 years

## Scan2Net® Advantages

- 64 bit Linux based computer, fast and virus protected
- Routable, easy integration into existing network structures
- Scans directly to SMB, FTP, hot folders, Email or the Cloud
- Simple, intuitive operation via full HD touchscreen

## TECHNICAL DATA

Maximum Scan Area	V2 Archive = 460 x 620 mm (18 x 24 inch), 14% more than DIN/ISO A2
Scanner Resolution	600 x 600 dpi
Scan Speed	DIN A2+ @ 150 dpi: 0.9 s, @ 200 dpi: 1.1 s, @ 300 dpi: 1.6 s, @ 400 dpi: 2.0 s, @ 600 dpi: 3.0 s
Color Depth	48 bit color, 16 bit grayscale
Scan Output	24 bit color, 8 bit grayscale, bitonal, enhanced halftone
File Formats	Multipage PDF (PDF/A) and TIFF, JPEG, JPEG 2000, PNM, PNG, BMP, TIFF (Raw, G3, G4, LZW, JPEG), AutoCAD DWF, JBIG, DjVu, DICOM, PCX, Postscript, EPS, raw data and more
ICC Profiles	Embedded for sRGB, Adobe RGB and native. Individual profiling via web based Scan2ICC subscription
Quality	Complies to FADGI *** guidelines, ISO 19264 Level B
Camera	CCD line sensor
Live Preview Camera	CMOS matrix, area sensor
Light Source	White LEDs, tested according to IEC 62471, no IR/UV emission
Lamp Life Time	50,000 h typ. Lamps are covered by the Extended Warranty Option
Computer	64 bit Linux, Intel® Core™ i3 generation 8 processor, 240GB SSD, 8 GB memory for extra large jobs
Touchscreen	21" full HD 1920 * 1080 multitouch screen
USB Port	2 x USB 3.0 port, 4 x USB 2.0 port
Interface	2,5 GBit fast Ethernet with TCP/IP based Scan2Net® interface
Dimension / Weight	V3 Archive = H x W x D: 840 x 585 x 625 mm (33 x 23 x 24.5 inch) / 48.5 kg (107 lbs.) V2 Archive = H x W x D: 870 x 730 x 670 mm (35 x 29 x 26 inch) / 53 kg (117 lbs.)
Electrical Specification	100-240 V AC, 47 - 63 Hz (external power supply, complies with ECO standard CEC level VI)
Power Consumption	< 0.5 W (Sleep) / 1.5 W (Standby) / 40 W (Ready to Scan) / 110 W (Scanning)
Environment	Operating temperature 5 to 40 °C, relative humidity 20 to 80% (non-condensing)
Noise	< 42 dB(A) (Scanning) / < 33 dB(A) (Standby)
Approvals	IEC/EN 62368-1:2014 Ed.2, AUS/NZL 62368-1:2014 Ed.2 UL 62368-1:2014 Ed.2, CSA 62368-1:2014 Ed.2, RoHS, WEEE



Visit our homepage!



IMAGE ACCESS GMBH

Hatzfelder Str. 161-163  
42281 Wuppertal, Germany  
Phone: +49 202 27058-0

[www.imageaccess.de](http://www.imageaccess.de)

IMAGE ACCESS LP

400 N. Belvedere Drive  
Gallatin, TN 37066, USA  
Phone: +1 (615) 675-4141

[www.imageaccess.us](http://www.imageaccess.us)

Technical changes, errors and omissions excepted.  
All information subject to change.. © Image Access GmbH 2025